

Tel: +44 (0)1484 400200
sales@cromar.co.uk


FREDERICK CROWTHER AND SON LTD



EST 1955

Series III Swarf Conveyor

Free standing unit, that is a totally integrated solution for both swarf management and coolant filtration.

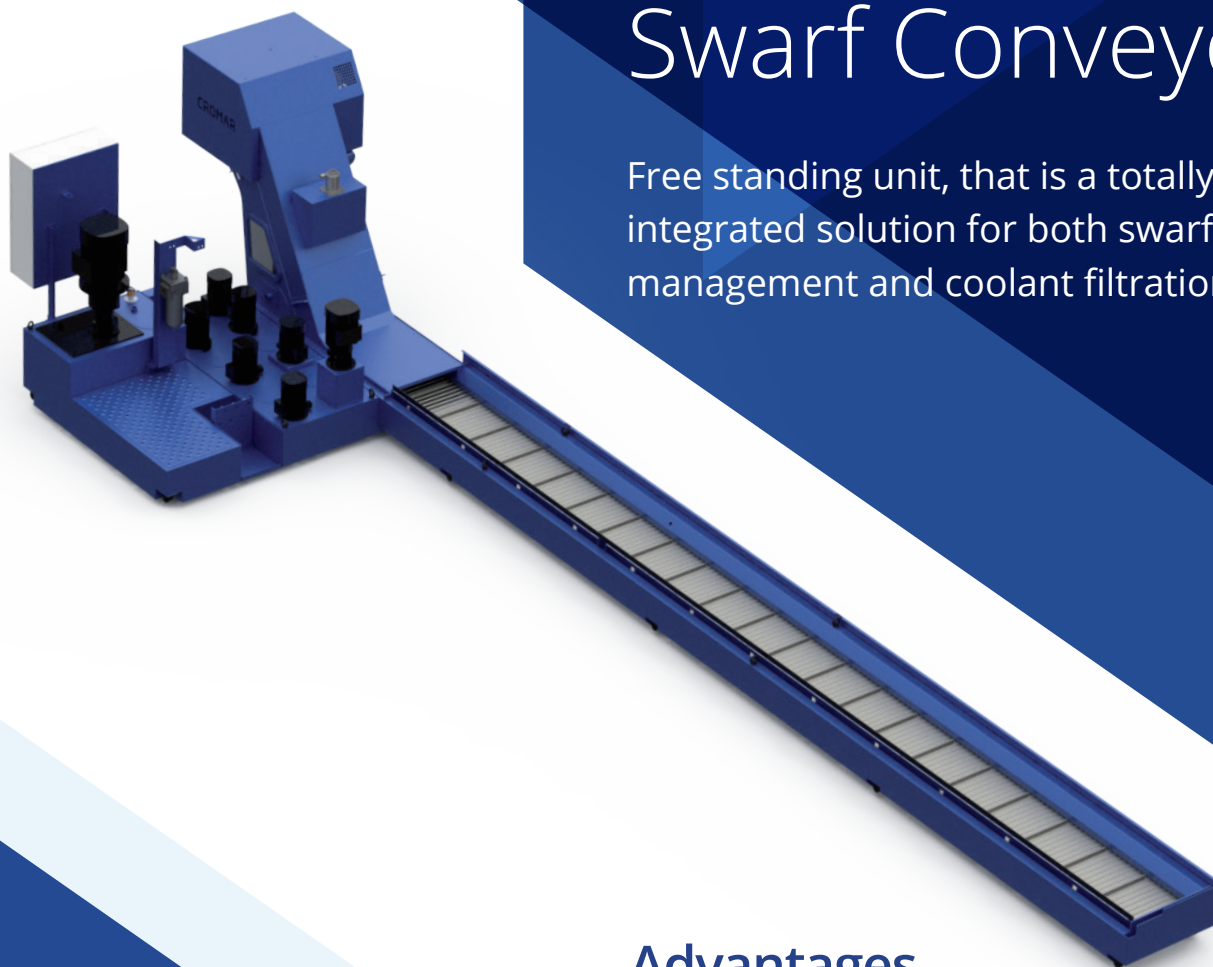

“Reliable swarf
and coolant
management”

Advantages

- ⊙ Self cleaning filter (rotary drum) no basket/filter plates to clean
- ⊙ Improved filtration
- ⊙ Less contamination in coolant tank, reduces opportunity of swarf damaging pumps
- ⊙ Suitable for fine swarf and normal swarf as produced from turning/milling
- ⊙ Aluminium, brass, cast iron and steel
- ⊙ Improved productivity
- ⊙ Increased tank capacity
- ⊙ Reduced maintenance
- ⊙ Environmentally friendly




EST 1955

Series III Swarf Conveyor

Key Applications:

- ⦿ Vertical machining centre
- ⦿ Horizontal machining centre
- ⦿ Mill-turn/Multi-tasking machine
- ⦿ Five axis machines

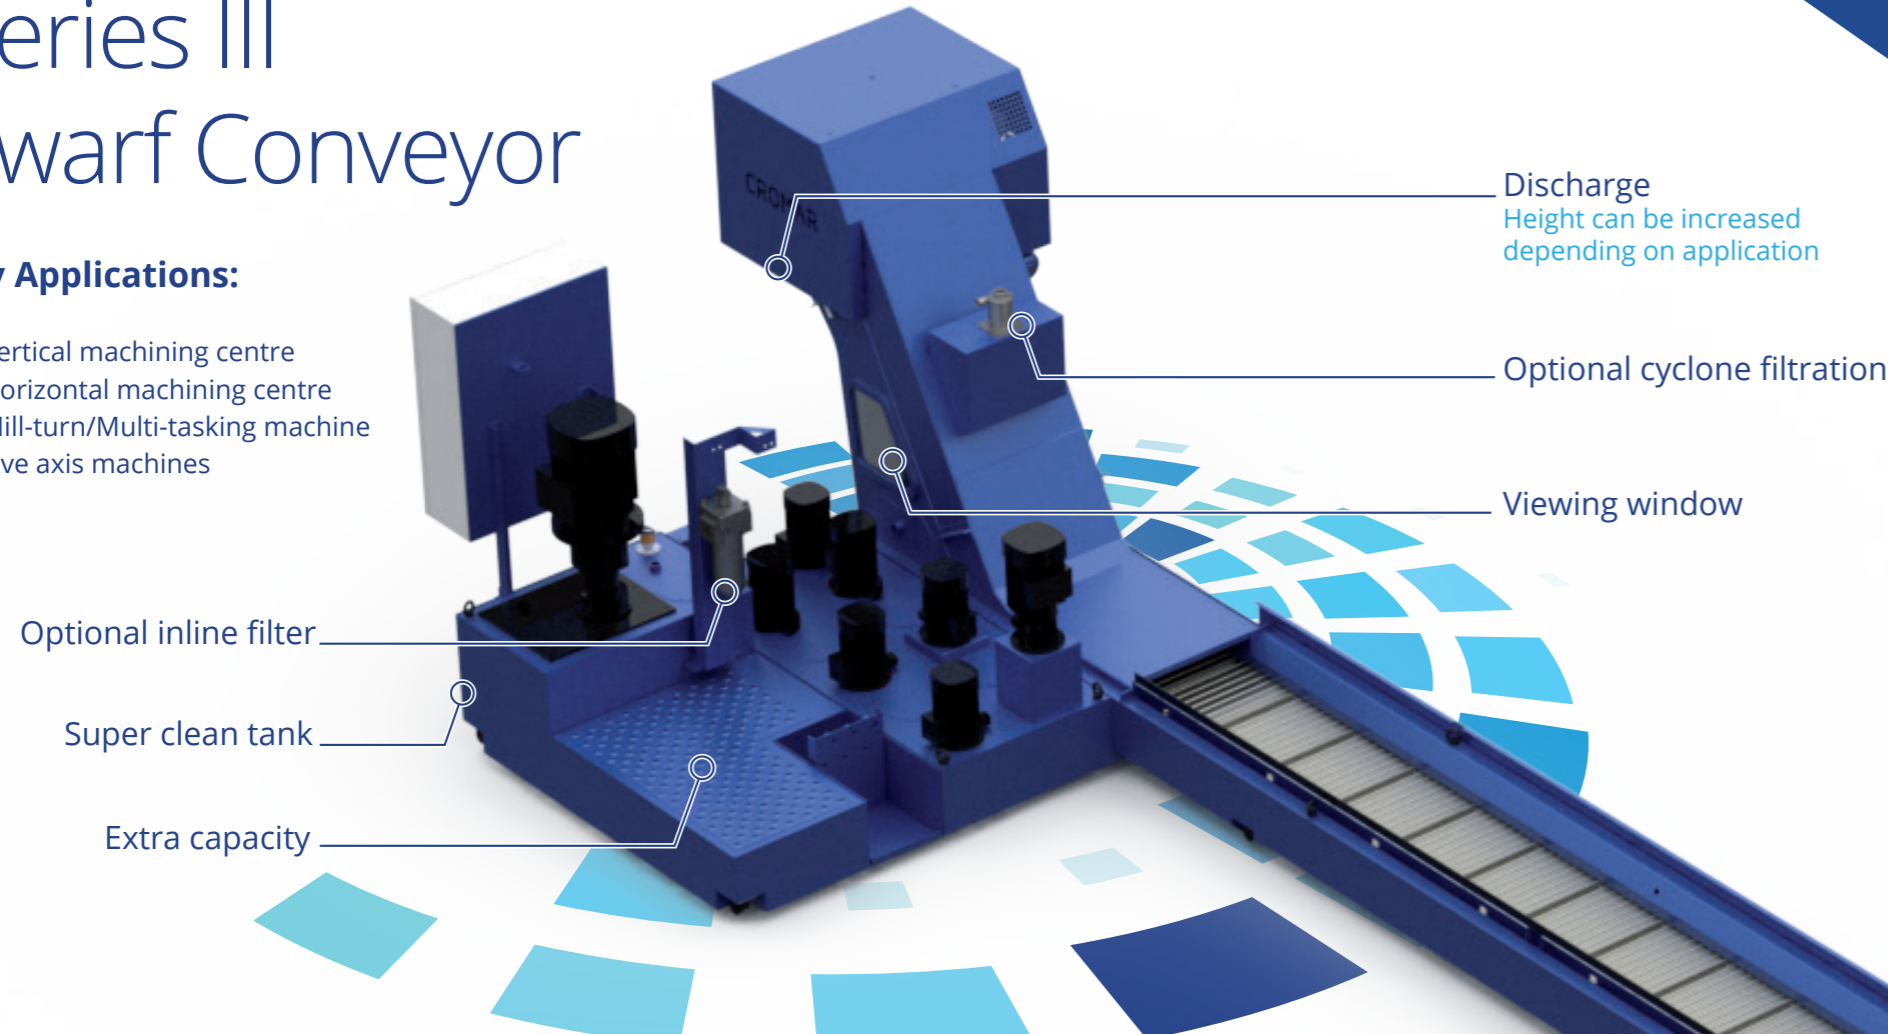

How it works...

Incorporating the heavy duty 1.5" pitch steel hinged slat type belt and the 1.5" pitch steel scraper type belt within the same conveyor casing, still incorporating the self cleaning rotary drum filtration system.

Both coolant and swarf enter the conveyor by deflector chutes ensuring that no swarf or coolant escapes onto the surrounding area. Generally the belt type conveyor will handle a large percentage of the swarf produced and will convey the swarf into a suitable collecting receptacle as a standard conveyor would.

However should there be small chipped swarf or particles of swarf present they will pass through the belt conveyor and will be deposited to the base of the conveyor where the drag type conveyor will collect and remove the swarf as standard.

All coolant will pass through the self-cleaning rotary drum equipped with a removable stainless steel filter media. To ensure that the filter media maintains a consistent filtration level and coolant throughput there is an internal backwash system that continually blasts coolant from within the drum as the drum rotates.

Media free filtration.

Specifications	Details	Cromar Series III
Chain Pitch	1½" Hollow Bearing	Standard
Conveyor Casing	2.5mm Mild Steel	Standard
Case Width - Maximum	1000mm	Optional
Case Width - Minimum	260mm (not allowing for tank)	Standard
Case Depth - Belt conveyor	120/97mm	Standard
Case Depth - Scraper conveyor	130mm (not allowing for tank)	Standard
Discharge height	850mm-1000mm	Standard
	1000mm +	Height can be increased depending on application (1000mm - 10000mm)
Motor (2off supplied to drive both slat belt and scraper)	0.25kW, 5.66RPM Can be increased to suit application.	Standard Optional
Gearbox	Helical geared	Standard
Filtration (µm)	Rotary drum - 400µm	Standard - SS mesh filter
	120µm	Optional
	240µm	Optional
Control Panel	Forward/Jog Reverse/E.Stop	Standard
	Timer	Optional
	Touch screen plc	Optional

Discharge
Height can be increased depending on application

Optional cyclone filtration

Viewing window

Optional inline filter


Super clean tank

Extra capacity

Adaptable
Offers excellent versatility

Heavy duty belt
1.5" pitch steel hinged slat type belt & 1.5" pitch steel scraper type belt within the same conveyor

Paint
All conveyors are supplied finished to suit the customers colour specification. Our finish is Powdercoat

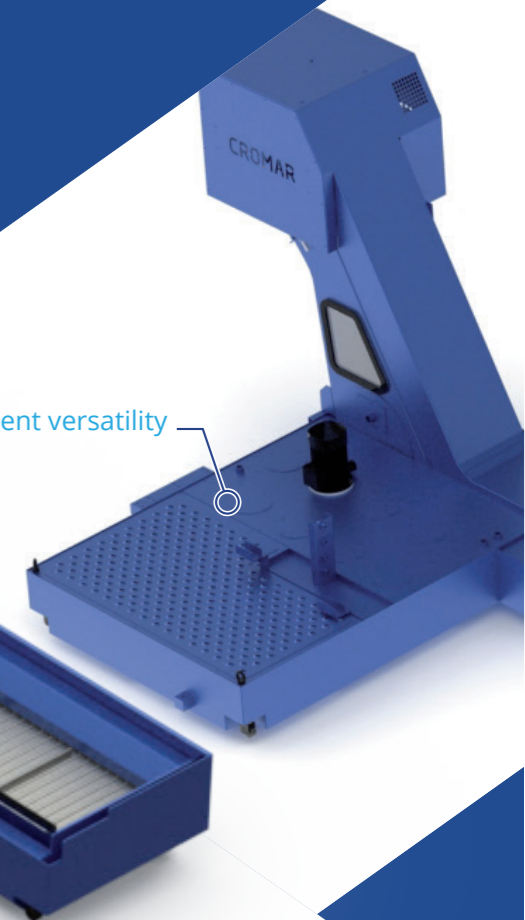

FREDERICK CROWTHER AND SON LTD



EST 1955

Frederick Crowther & Son Ltd
Locksley Works,
Armytage Road Industrial Estate,
Armytage Road, Brighouse,
West Yorkshire, HD6 1QF
Tel: +44 (0) 1484 400200
Fax: +44 (0) 1484 728088

Cromar Metal Products Ltd
Unit 2 & 3 Guards Road Industrial Estate,
Guards Road, Coldstream, TD12 4EE
Tel: +44 (0) 1890 883139
Fax: +44 (0) 1890 882944
www.cromar.co.uk